


INSTALL INSTRUCTIONS STC-301 Fog Light Kit - 2011 SCION tC

1. Remove negative battery cable
2. Remove both fender liner corners
3. Remove existing fog light cover on both sides
4. Lamps are marked for installation on the left or right side of vehicle. Install lamps by inserting inboard tabs into sockets in bumper. Rotate lamp into installed position and make sure tab on outboard side is on the boss on the bumper



5. Secure lamp into bumper with screw provided in this kit and snap on the both fog light bezel
6. Lay harness over top of engine. Route the short end of wire with 2-pin connector down through the opening near the driver side of battery. Plug it into the driver side lamp
7. Route wiring underneath the battery retention and coolant overflow hose

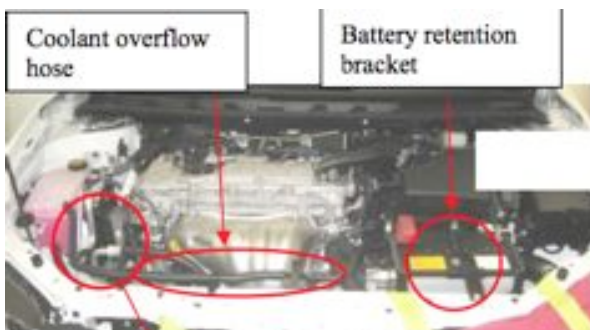


8. Route the end of wire with 2-pin connector through the opening under passenger side headlight. Reach underneath bumper. Plug harness to lamp
9. Route wire with single-pin connector down beside battery
10. Locate the vehicle single-pin connector behind bumper (below and in front of battery). Connect harness to this connector.
11. Attach the ground ring terminal of the fog lamps wire harness to the ground wire of the battery.
12. Secure the wire harness across the engine compartment with wire ties
13. Reinstall fender liner corners

Inside Cabin Area

14. Detach the mirror control panel and remove the right switch knock out from this panel
15. Find the 4-pin connector inside of instrument panel and remove electrical tape. Connect switch harness to factory 4-pin connector. Thread wire through opening in panel and connect it to fog lamp switch. Mount switch into panel's knock out
16. Reinstall mirror control panels
17. Remove the radio head unit,
18. Loosen the screw holding the relay bracket in place, located behind the radio head unit
19. Raise bracket up and install the supplied relay in the middle port of the relay bracket (second port from down to top)

INSTALL INSTRUCTIONS STC-301 Fog Light Kit - 2011 SCION tC

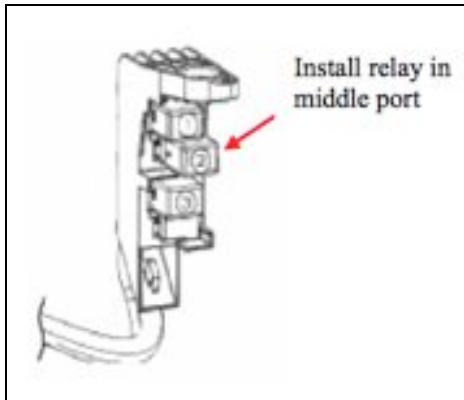

20. Reinstall radio head unit and instrument cluster finish
21. Reinstall cover over radiator
22. Reconnect negative cable of battery to the negative terminal of battery.